


Regarding your 32ch security camera system connection


Before we want to watch the system on the mobile phone, we have to make sure the camera and NVR had been connected and the cameras can be viewed on the NVR.

This is the first step that at least we see the system working.

If we do the correct connection as below that cameras connected to the PoE switch, and PoE switch connected to the LAN 2 port of the NVR recorder, and LAN 1 port of the NVR recorder connected to your router/switch.

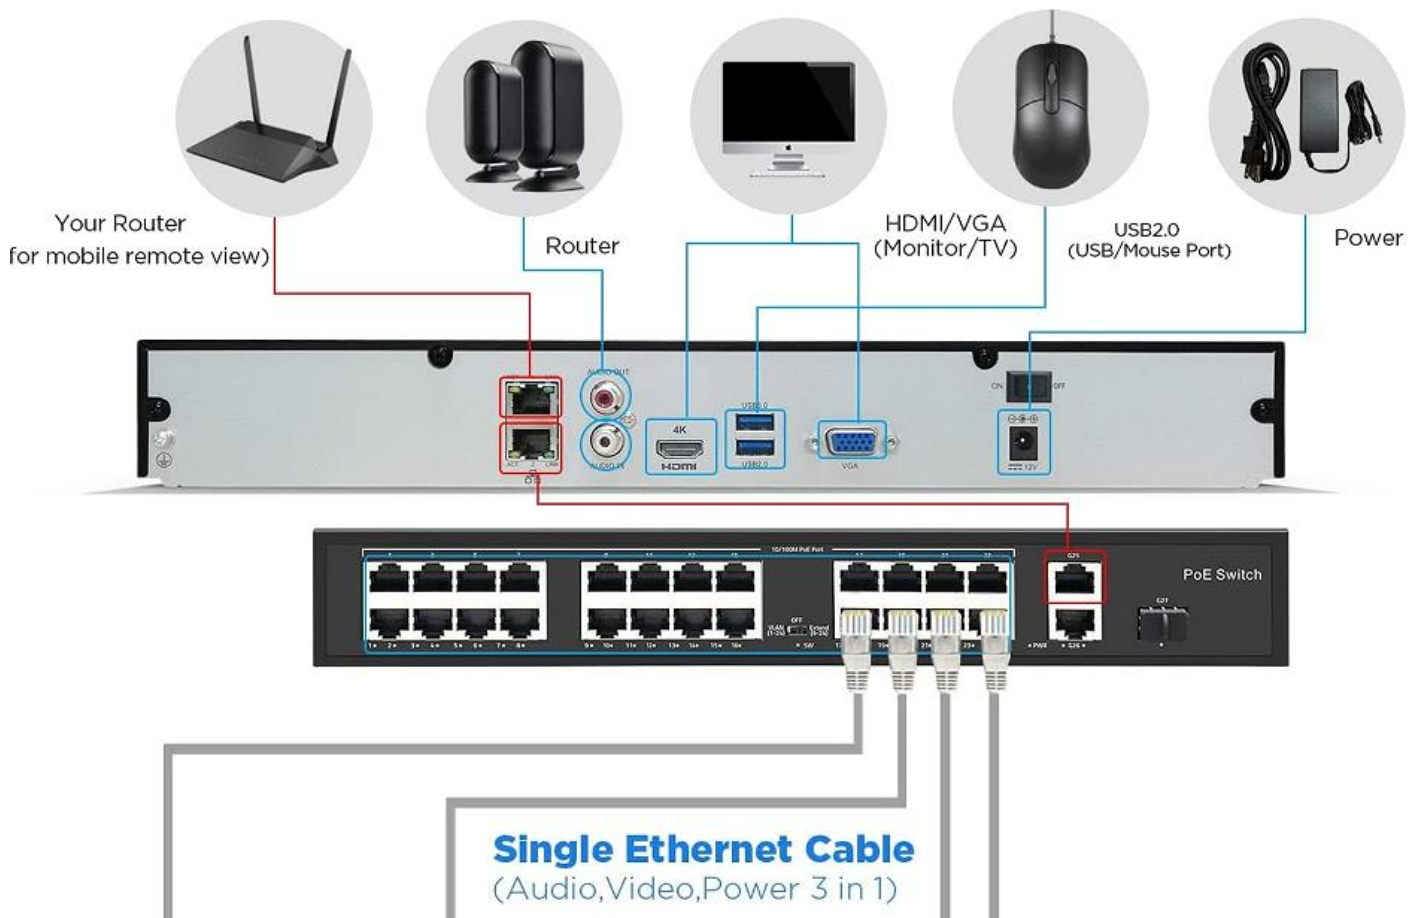


Then in your NVR menu of the camera settings, the cameras will be found and you can add them all into your NVR recorder. Or you can click "Refresh" several time until the device to be found. Like picture below.

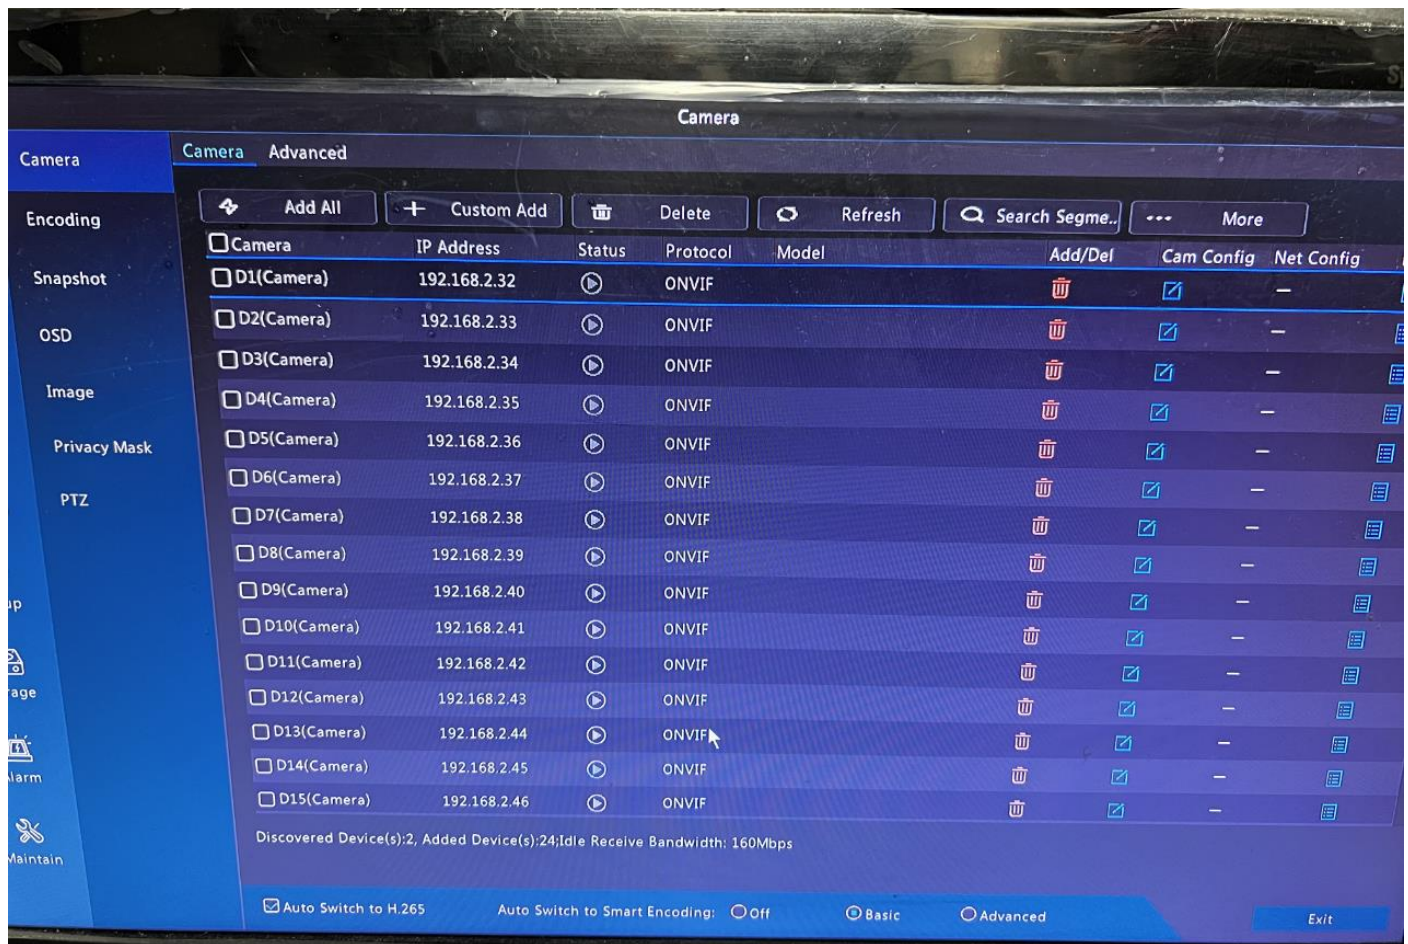


Alternative:

Or let's do in another solution. **Connect NVR recorder's LAN 1 port to your router/switch, and then connect our PoE switch into your router/switch too.** Like diagram as below.

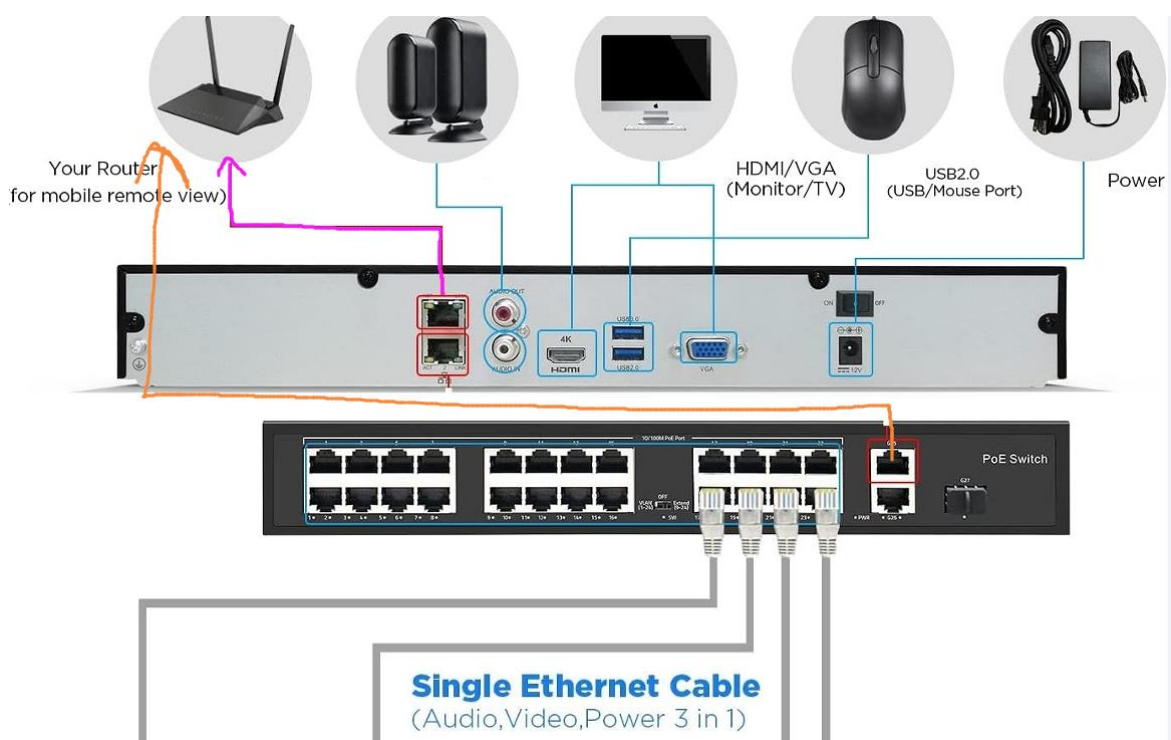

And then, login your NVR recorder, main menu>Network>Basic>TCP/IP, and “enable DHCP”

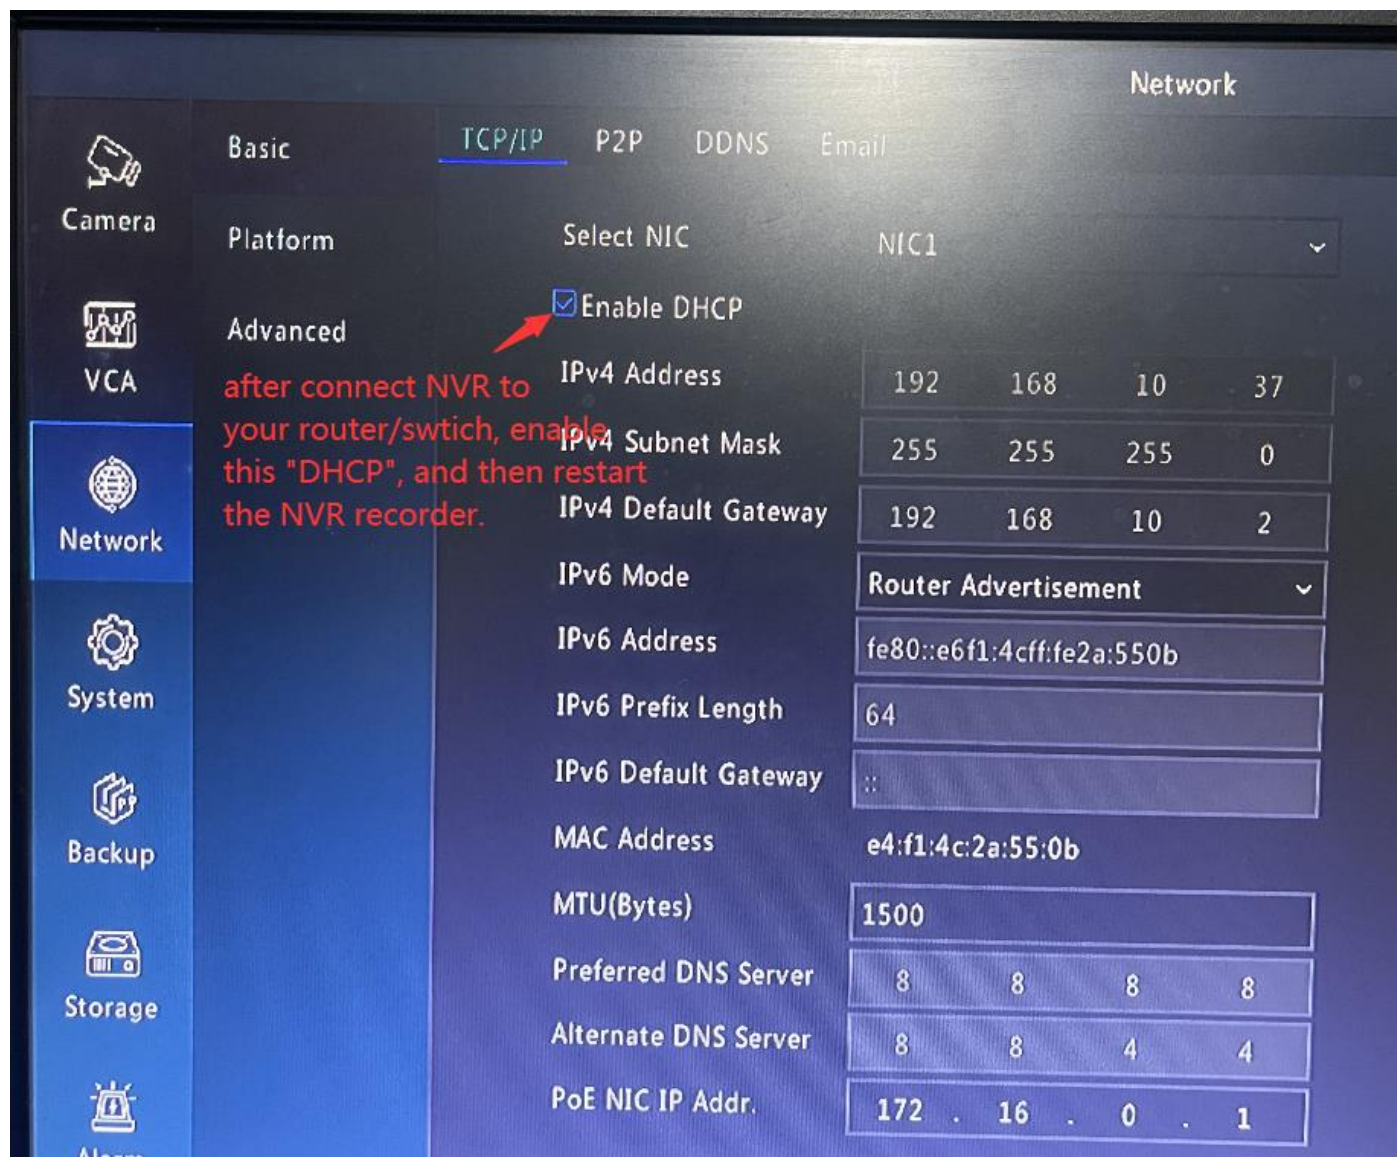

And then after the NVR restarted, let's check in the “camera” again, click “refresh”, and let's check again if the cameras can be found on your NVR recorder.