


- 2MP Fixed-focal HDR IR Bullet Network Camera
- GW-H49RC80-LP

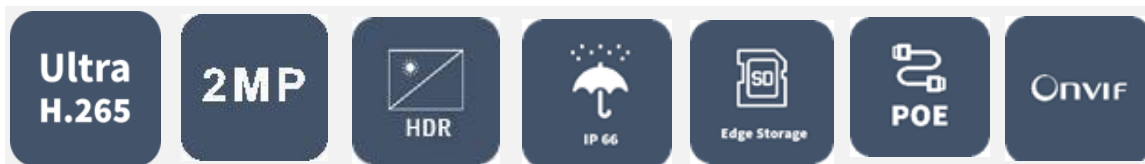

Features


- 2Mp 1/2.8" Sony Exmor Star Light CMOS Sensor;
- illumination color 0.001Lux@F1.2, B/W: 0.005Lux @F1.2;
- Day/Night, AWB/MWB, BLC, HLC, 2D/3D-DNR, Shutter, IR-CUT
- HDR, Mirror, rotate, Defogging
- Multiply Style OSD Overlay, Motion Detection, Privacy Mask
- RTSP and Onvif 17.06 compatible with many third-party NVR
- H.264/H.265 dual-stream media server
- Easy-to-use P2P Cloud service
- Support user authentication, video data encryption
- Support Alarm Snapshot to Email and FTP
- Multiply WEB browser IE, Firefox 32bit ESR, PC Client, Mobile APP remote access
- RJ45 100mbps network port, IEEE802.3af PoE
- IP66,
- 18PCS SMD IR Led, IR distance up to 30m
- 2.8/3.6mm
- Built-in Mic (optional), Micro-sd card up to 256G (optional)
- Junction Box (optional)

▪ Technical Specifications

Camera					
Image Sensor	1/2.8" Sony Low light CMOS sensor				
Effective Pixels	1945 (H) × 1097 (V)				
Electronic Shutter	AUTO, 1/25s ~ 1/100000s				
Min. Illumination	0.001Lux@F1.2(AGC ON), 0Lux IR on				
IR Led	18PCS SMD IR LED				
IR Distance	Up to 30m				
Focal length	Fixed 2.8/3.6mm				
Iris Type	Fixed				
Field of View	2.8 mm: Horizontal 103.0° × Vertical 71.0° × Diagonal 132.0° 3.6 mm: Horizontal 84.0° × Vertical 58.0° × Diagonal 110.0°				
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	2.8mm	56m	22.4m	11.2m	5.6m
	3.6mm	80m	32m	16m	8m
Video					
Video Standard	H.265/H.264				
Video Resolution	Main Stream: 1-30fps@2MP(1920x1080P); 1-30fps@720P Sub stream: D1/VGA(640x480)/640x360@30fps				
Video Bitrates	32Kbps - 5Mbps, VBR/CBR				
Day/Night	Auto/Color/(B/W)/Timing				
WDR	Digital WDR, HDR				
White Balance	Auto/Indoor/Outdoor				
AGC/BLC/HLC	Support				
DNR	2D/3D DNR				

OSD Overlay	Title and Time overlay
Other	Motion Detection, uman Body detection, Privacy Mask, Mirror, Flip
Audio	
Audio Standard	G.711-u/G.711-a/AAC
Mic	Optional
Network	
Protocol	HTTP/RTSP/FTP/SMTP/DHCP/NTP/NFS, etc.
P2P	Yes
Web	IE, Firefox esr, etc.
Media	CMS, Android, IOS
Storage	Micro-sd card up to 256G (optional), FTP; NAS,
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps,
Power Supply	12 VDC $\pm$ 10%, PoE(802.3af)
Power Consumption	<6W
Operating Temp.	-30°C -(+60)°C, 10%-90%RH

▪ Dimensions (mm)

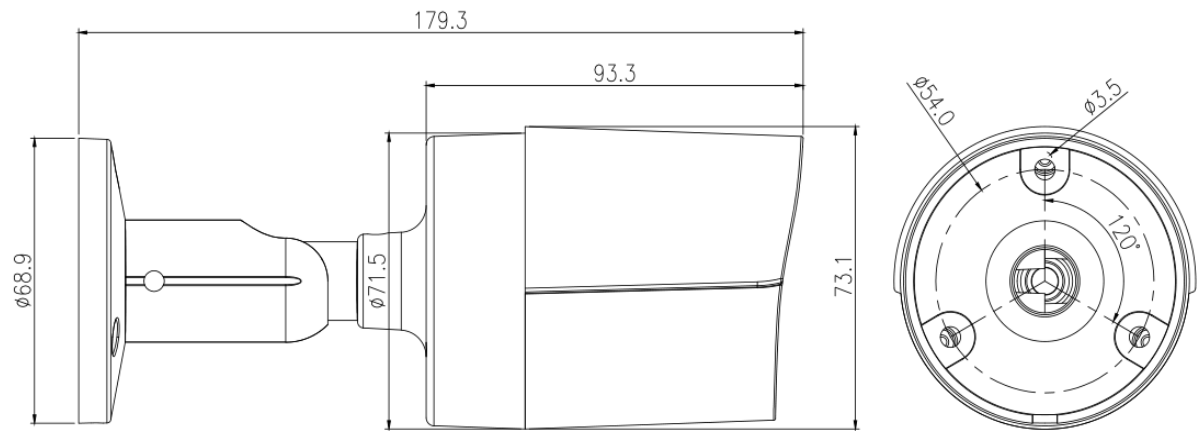

▪ Accessories



Junction Box GW-FSH-04A