

- 2MP 10X Vari-focal Long Rang IR HDR Bullet Network Camera
- GW-HWZ86RC80-LMP-10



Features

- 2Mp 1/2.8" Sony Exmor Star Light CMOS Sensor;
- illumination color 0.001Lux@F1.2, B/W: 0.005lux @F1.2;
- Day/Night, AWB/MWB, BLC, HLC, 2D/3D-DNR, Shutter, IR-CUT
- HDR, Mirror, rotate, Defogging
- Multiply Style OSD Overlay, Motion Detection, Privacy Mask
- RTSP and Onvif 17.06 compatible with many third-party NVR
- H.264/H.265 dual-stream media server
- Easy-to-use P2P Cloud service
- Support user authentication, video data encryption
- Support Alarm Snapshot to Email and FTP
- Multiply WEB browser IE, Firefox 32bit ESR, PC Client, Mobile APP remote access
- RJ45 100mbps network port, IEEE802.3af PoE
- IP66,
- 4 pcs Hi-power Array IR Leds, IR distance up to 70-80m
- Motorized lens 5-50mm, 10X


Technical Specifications.

Camera	GW-HWZ86RC80-LMP-10
Image Sensor	1/2.8" Sony Low light CMOS sensor
Effective Pixels	1945 (H) × 1097 (V)
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.001Lux@F1.2(AGC ON), 0Lux IR on

IR Led	4 pcs Hi-power Array IR Leds,
IR Distance	Up to 70-80m
Focal length	Motorized Lens 5-50mm
Video	
Video Standard	H.265/H.264
Video Resolution	Main Stream: 1-30fps@2MP(1920x1080P); 1-30fps@720P Sub stream: D1/VGA(640x480)/640x360@30fps
Video Bitrates	32Kbps - 5Mbps, VBR/CBR
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR, HDR
White Balance	Auto/Indoor/Outdoor
AGC/BLC/HLC	Support
DNR	2D/3D DNR
OSD Overlay	Title and Time overlay
Other	Motion Detection, Privacy Mask, Mirror, Flip
Audio	
Audio Standard	G.711-u/G.711-a
Network	
Protocol	HTTP/RTSP/FTP/SMTP/DHCP/NTP/NFS, etc.
P2P	Yes
Web	IE, Firefox esr, etc.
Media	CMS, Android, IOS
Storage	FTP; NAS,
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps,
Power Supply	12 VDC $\pm$ 10%, PoE(802.3af)
Power Consumption	< 8W

Operating Temp.	-30°C -(+60)°C, 10%-90%RH
-----------------	---------------------------

▪ Dimensions (mm)

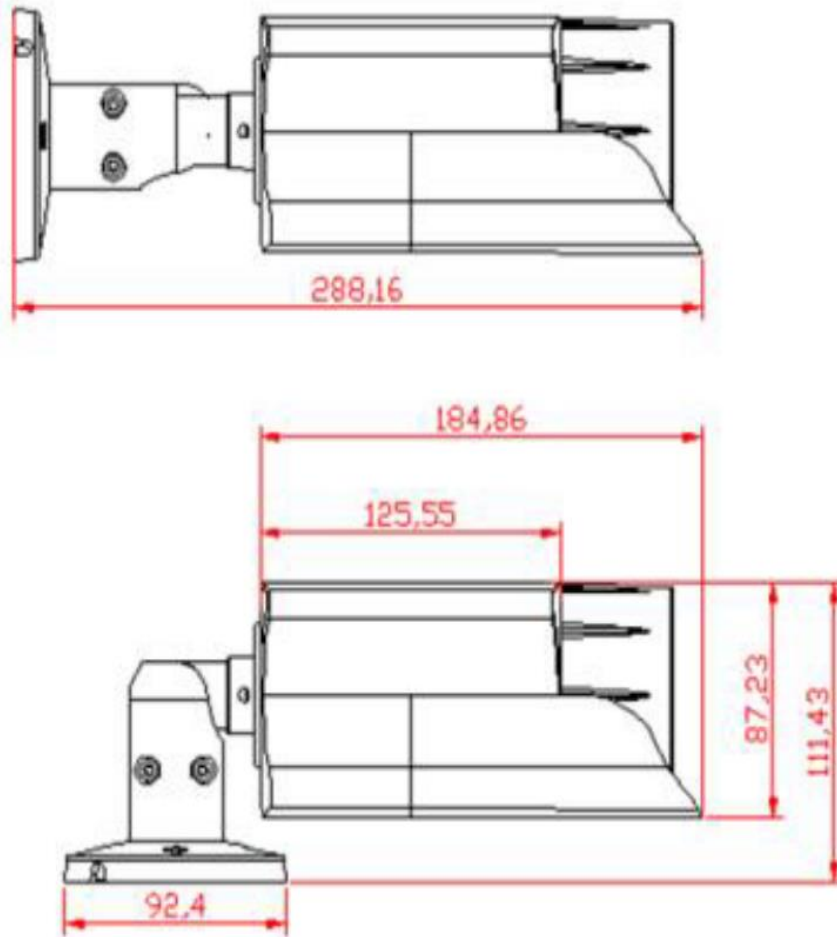

▪ Accessories



Junction Box GW-FSH-04A,