

▪ 4MP IR Vari-focal Dome Network Camera

- GW-HDB54RC84-FP



▪ Features

- 1/3" Progressive Scan CMOS sensor, low illuminance, high image definition
- 4MP HD resolution 2560 x 1440
- SMD IR Led 18pcs, IR distance up to 30m
- 2.8-12mm vari-focal
- Day/Night (ICR), AWB, AGC, WDR, 2D/3D-DNR, IR-CUT;
- Motion Detection, Privacy Mask, OSD;
- RTSP and Onvif compatible
- H.265/HEVC Main Profile/High Profile; H.264 Main Profile/High Profile
- Easy-to-use P2P Cloud service
- Multi web browser, PC Client, mobile APP remote access
- Lightning protection 4000V
- PoE 802.3af
- IP66, IK10
- Built-in Microphone optional


▪ Technical Specifications

Camera	
Image Sensor	1/3" Progressive Scan CMOS sensor
Effective Pixels	2560 x 1440
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on

IR Led	18pcs SMD LEDs
IR Distance	Up to 30m
Focal length	2.8-12mm vari-focal
Video	
Video Standard	H.265/H.264
Video Resolution	Main Stream: 25FPS 4mp @2560×1440, 30FPS 3mp @(2304×1296,1080P,720P Sub Stream: 640x360/D1/640*480 @25fps/30fps
Video Bitrates	32Kbps - 8Mbps, VBR/CBR
Day/Night	Auto/Color/(B/W)/Timing
WDR	120dB
White Balance	Auto/Indoor/Outdoor
AGC/BLC/HLC	Support
DNR	2D/3D DNR
OSD Overlay	Title and Time overlay
Other	Motion Detection, Privacy Mask, Mirror, Flip
Audio	
Audio Standard	G.711-u/G.711-a
Mic	Optional
Network	
Protocol	HTTP/RTSP/FTP/SMTP/DHCP/NTP/NFS, etc.
P2P	Yes
Web	IE, Firefox esr, etc.
Media	CMS, Android, IOS
Storage	FTP; Micro SD Card Optional; NAS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps,
Power Supply	12 VDC ± 10%, PoE(802.3af)

Power Consumption	< 6W
Operating Temp.	-30°C -(+60)°C, 10%-90%RH

▪ Dimensions (mm)

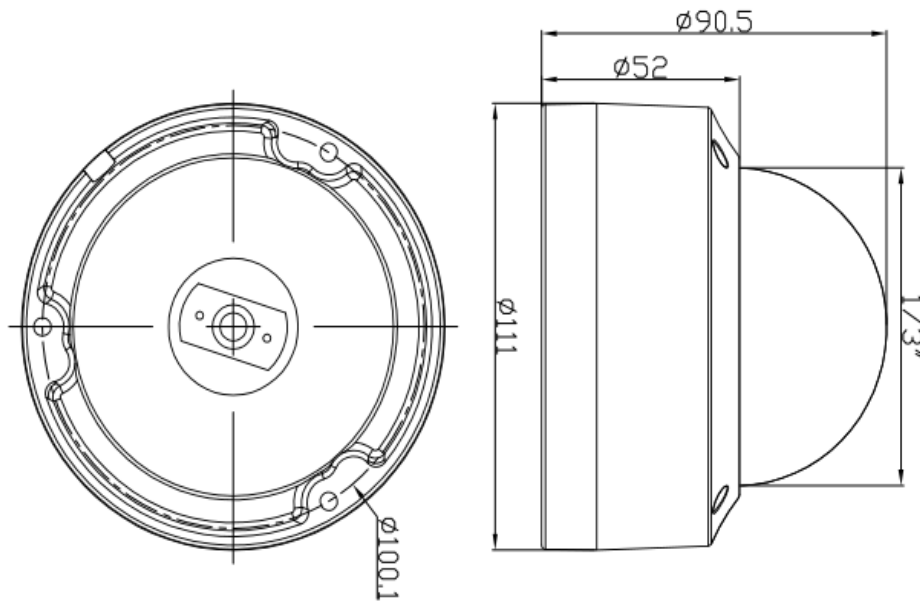

▪ Accessories



Junction Box GW-FSH-05A,



Bracket GW-J15-05A