

- 2MP Smart Dual Light Eyeball IP Camera with two-way talk and SD Card Slot
- GW-HDK97RC80-LP-DL



• Features

- 2MP 1980x1080
- illumination color 0.001Lux@F1.2, B/W: 0.005lux@F1.2;
- Built-in warm light and IR LED,
- Full-color image when detect human moving.
- Built in two-way audio and SD card slot.
- IR distance: up to 30m
- Material: Metal
- IP66, PoE
- 2.8mm/F1.6 Fixed lens
- Popular Dome Camera, Easy to install



• Technical Specifications

Camera	
Image Sensor	1/2.8" Sony Low light CMOS sensor

Effective Pixels	1945 (H) × 1097 (V) (2MP)
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.001Lux@F1.0(AGC ON), 0Lux IR on
IR Led	2pcs Warm light and IR LED
IR Distance	Up to 30m
Focal length	2.8mm fixed lens @F1.6
Video	
Video Standard	H.265/H.264
Video Resolution	Main Stream: 1-30fps@2MP(1920x1080P); 1-30fps@720P Sub stream: D1/VGA(640x480)/640x360@30fps
Video Bitrates	512Kbps -8Mbps, VBR/CBR
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Indoor/Outdoor
AGC/BLC/HLC	Support
DNR	2D/3D DNR
OSD Overlay	Title and Time overlay
Other	Human Body detection, Motion Detection, Privacy Mask, Mirror, Flip
Audio	
Audio Standard	G.711-u/G.711-a
Mic	Yes
Speaker	Yes
Network	
Protocol	HTTP/RTSP/FTP/SMTP/DHCP/NTP/NFS, etc.
P2P	Yes
Web	IE, Firefox esr, etc.
Media	CMS, Android, IOS
Storage	FTP; NAS, Micro-sd card slot up to 256GB

ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps,
Power Supply	12 VDC $\pm$ 10%, PoE(802.3af)
Power Consumption	< 8W
Operating Temp.	-30°C -(+60)°C, 10%-90%RH

▪ Dimensions (mm)

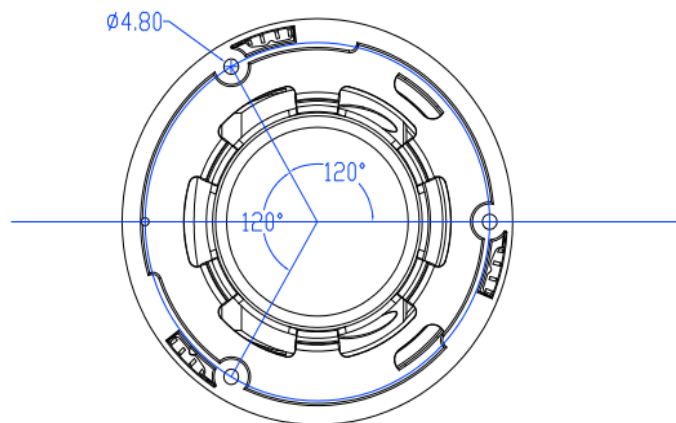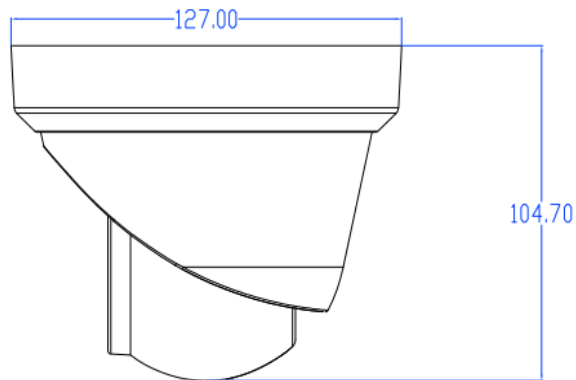

▪ Accessories



Junction Box GW-FSH-06A,



Bracket GW-J15-03A