

- 2MP Full-color Fixed-focal Warm LED Bullet IP Camera
- GW-HWA57RC80-LP-LED



Features

- 24/7 color imaging
- 2MP 1980x1080
- illumination color 0.001Lux@F1.2, B/W: 0.005lux@F1.2;
- Day/Night, AWB/MWB,BLC, HLC, 2D/3D-DNR,Shutter, IR-CUT
- D-WDR,Mirror, rotate, Defogging
- Multiply Style OSD Overlay,Motion Detection, Privacy Mask
- RTSP and Onvif 17.06 compatible with many third-party NVR
- H.264/H.265 dual-stream media server
- Easy-to-use P2P Cloud service
- Support user authentication, video data encryption
- Support Alarm Snapshot to Email and FTP
- RJ45 100mbps network port, IEEE802.3af PoE
- Lightning protection 4000V
- Strong water-proof housing, IP66
- HD 2.8 F1.0 star light lens
- 4PCS Soft & Warm Supplemental Light, up to 40m


Technical Specifications

Camera	
Image Sensor	1/2.8" Sony Low light CMOS sensor

Effective Pixels	1945 (H) × 1097 (V) (2MP)
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.001Lux@F1.2(AGC ON), 0Lux IR on
IR Led	4PCS Soft & Warm Supplemental Light
IR Distance	Up to 40m
Focal length	2.8mm star light fixed lens @F1.0
Video	
Video Standard	H.265/H.264
Video Resolution	Main Stream: 1-30fps@2MP(1920x1080P); 1-30fps@720P Sub stream: D1/VGA(640x480)/640x360@30fps
Video Bitrates	512Kbps - 12Mbps, VBR/CBR
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Indoor/Outdoor
AGC/BLC/HLC	Support
DNR	2D/3D DNR
OSD Overlay	Title and Time overlay
Other	Human Body detection, Motion Detection, Privacy Mask, Mirror, Flip
Audio	
Audio Standard	G.711-u/G.711-a
Mic	Optional
Network	
Protocol	HTTP/RTSP/FTP/SMTP/DHCP/NTP/NFS, etc.
P2P	Yes
Web	IE, Firefox esr, etc.
Media	CMS, Android, IOS
Storage	FTP; NAS, Micro-SD Card max. 256G (optional)
ONVIF	17.06 compatible

General	
Network Port	1-RJ45, 100Mbps,
Power Supply	12 VDC $\pm$ 10%, PoE(802.3af)
Power Consumption	< 8W
Operating Temp.	-30°C -(+60)°C, 10%-90%RH

▪ Dimensions (mm)

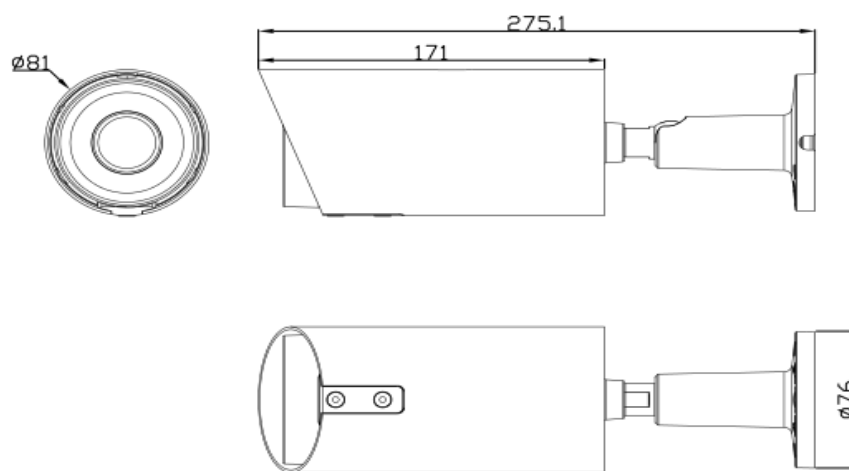

▪ Accessories



Junction Box GW-FSH-04A,