

- 4-ch 1-SATA Ultra 265/H.265/H.264 4K (PoE) NVR
- NVR3104-(P4)-S3



• Key Features

- Support Ultra 265/H.265/H.264 video formats
- 4-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 1-ch HDMI, 1-ch VGA
- HDMI and VGA simultaneous output
- Up to 4K resolution recording
- 1 SATA HDD up to 6 TB
- Support cloud upgrade

▪ Specifications


Model	NVR3104-S3	NVR3104-P4-S3
Video/Audio Input		
IP Video Input	4-ch	
Two-way Audio Input	1-ch, RCA	
Network		
Incoming Bandwidth	64Mbps	
Outgoing Bandwidth	48Mbps	
Remote Users	128	

Protocols	P2P, UPnP, NTP, DHCP, PPPoE	
Video/Audio Output		
HDMI/VGA Output	HDMI: 3840x2160/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
Recording Resolution	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Audio Output	1-ch, RCA	
Synchronous Playback	4-ch	
Corridor Mode Screen	3/4	
Decoding		
Decoding format	Ultra 265/H.265/H.264	
Live view/Playback	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Capability	1 x 4K@30, 4 x 5MP@25, 4 x 4MP@25, 4 x 3MP@25, 4 x 1080p@30	
Hard Disk		
SATA	1 SATA interface	
Capacity	up to 6TB for each disk	
External Interface		
Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface	
USB Interface	Rear panel: 2 x USB2.0	
PoE		
Interface	N/A	4 RJ45 10M/100M self-adaptive Ethernet Interface
Max Power	N/A	Max 30W for single port Max 54W in total
Supported Standard	N/A	IEEE 802.3at, IEEE 802.3af

General

Power Supply	12V DC Power Consumption: ≤ 5 W (without HDD)	48V DC Power Consumption: ≤ 9 W (without HDD)
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity $\leq 90\%$ RH (non-condensing)	
Dimensions (W×D×H)	260mm × 240mm × 47mm (10.2"×9.4"×1.9 ")	
Weight (without HDD)	1.1kg (2.43 lb)	


- Dimensions (mm)

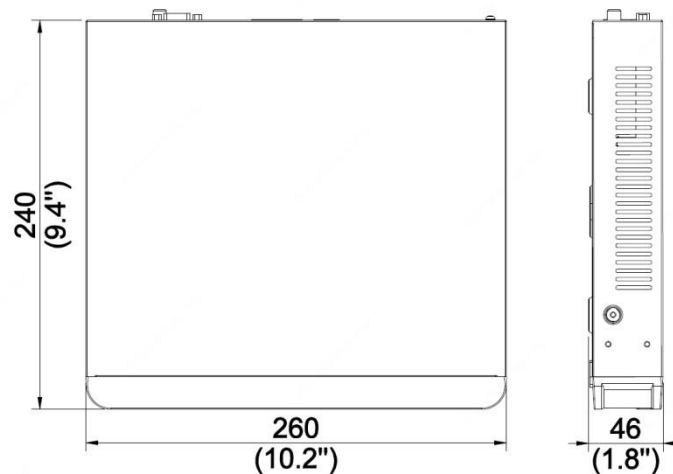

- Rear Panel



NVR3104-S3

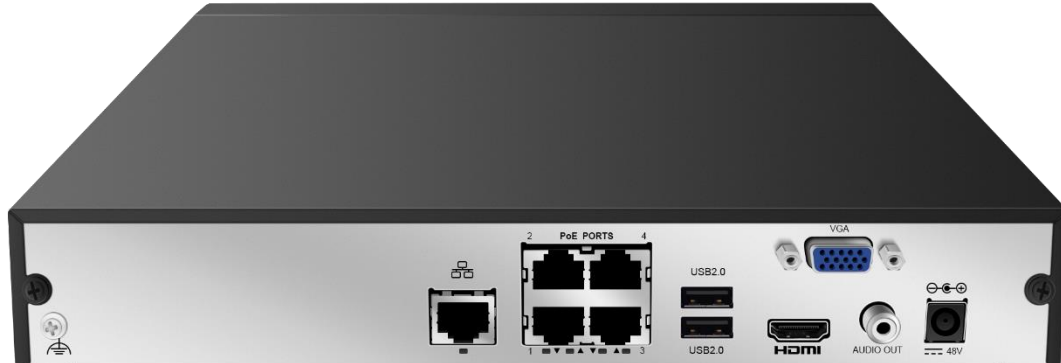

NVR3104-P4-S3