

- 8-ch 1-SATA Ultra 265/H.265/H.264 4K (PoE) NVR
- GW-NVR3104-P4



Features

- Support Ultra 265/H.265/H.264 video formats
- 8-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 1-ch HDMI, 1-ch VGA
- HDMI and VGA simultaneous output
- Up to 4K resolution recording
- 1 SATA HDD up to 10 TB
- Support cloud upgrade


Technical Specifications

Model	NVR3108	NVR3108-P8
Video/Audio Input		
IP Video Input	8-ch	8-ch
Two-way Audio Input	1-ch, RCA	
Network		
Incoming Bandwidth	64Mbps	80Mbps
Outgoing Bandwidth	64Mbps	
Remote Users	128	
Protocols	P2P, UPnP, NTP, DHCP, PPPoE	
Video/Audio Output		

HDMI/VGA Output	HDMI: 3840x2160/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
	VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
Recording Resolution	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Audio Output	1-ch, RCA	
Synchronous Playback	8-ch	
Corridor Mode Screen	3/4/5/7/9	
Decoding		
Decoding format	Ultra 265/H.265/H.264	
Liveview/Playback	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Capability	2 x 4K@30, 3 x 5MP@30, 4 x 4MP@30, 5 x 3MP@30, 8 x 1080p@30, 16 x 720p@30	
Hard Disk		
SATA	1 SATA interface	
Capacity	up to 10TB for each disk	
External Interface		
Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface	
USB Interface	Rear panel: 1 x USB2.0, 1 x USB3.0	
PoE		
Interface		8 independent 100 Mbps PoE network interfaces
Max Power	N/A	Max 30W for single port Max 108W in total (13.5W for each)
Supported Standard	N/A	IEEE 802.3at, IEEE 802.3af
General		

Power Supply	12V DC, Power Consumption: ≤ 7 W (without HDD)	52V DC, Power Consumption: ≤ 8 W (without HDD)
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity $\leq 90\%$ RH (non-condensing)	
Dimensions (W×D×H)	260mm × 240mm × 47mm (10.2"×9.4"×1.9")	
Weight (without HDD)	1kg (2.20 lb)	

- Dimensions (mm)

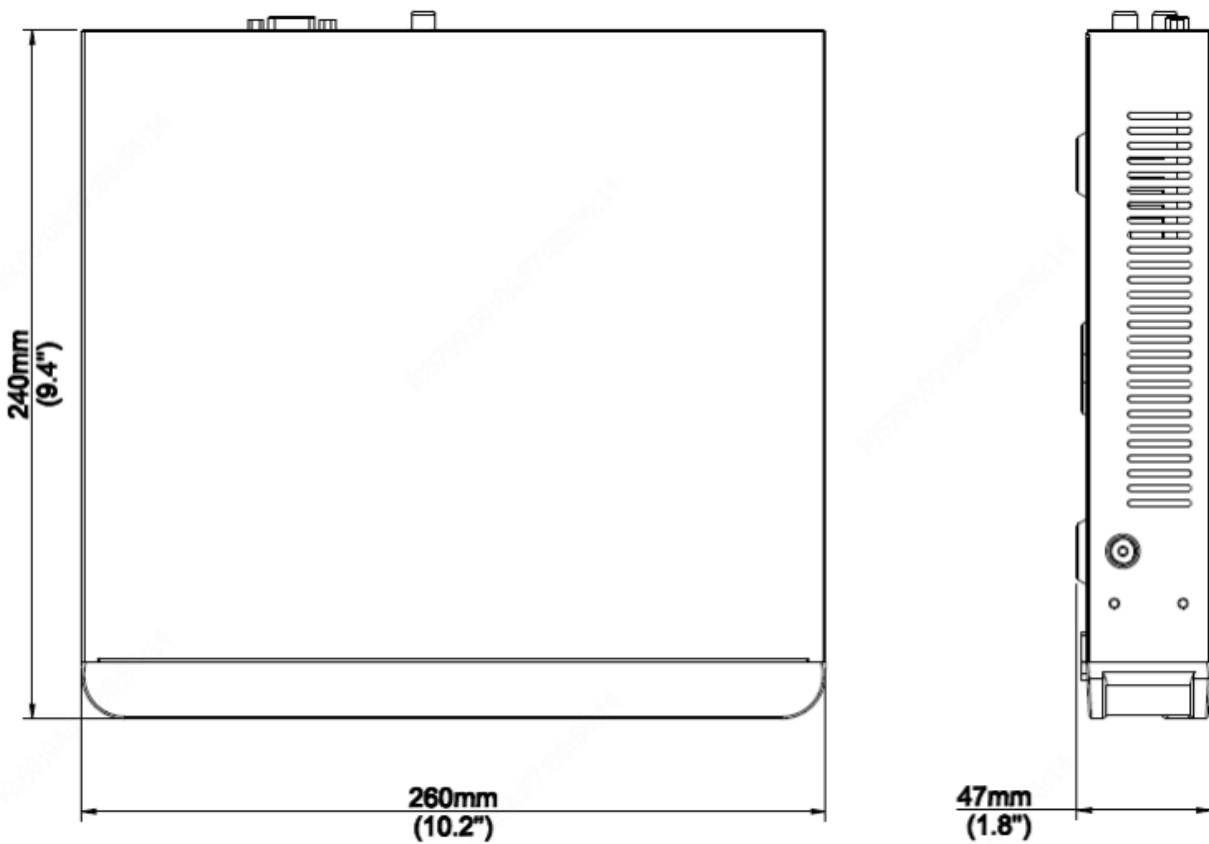

- Real Panel

NVR3108-P8

